



Reg. No. :

--	--	--	--	--	--	--	--	--	--	--

Question Paper Code : X10604

B.E./B.Tech. DEGREE EXAMINATIONS, NOVEMBER/DECEMBER 2020 AND
APRIL/MAY 2021

Fourth Semester

Electrical and Electronics Engineering

IC 8451 – CONTROL SYSTEMS

(Electronics and Instrumentation Engineering/Instrumentation and Control
Engineering)

(Regulations 2017)

Time : Three Hours

Maximum : 100 Marks

Answer ALL questions

PART – A

(10×2=20 Marks)


1. Define transfer function.
2. What are the memory elements in mechanical translation and electrical system ?
3. Derive the impulse response of first order system.
4. An open loop transfer function of unity feedback system is given as $G(s) = \frac{10}{(s+1)}$.
What is its steady state error for unit step input ?
5. Define gain margin and phase margin.
6. Find the type and order of the system $G(s) = \frac{10}{s^2(s+1)(s+2)}$.
7. Define Nyquist stability criterion.
8. Compare lag compensator with lead compensator.
9. What are the advantages of state space analysis ?
10. Write the state model of a linear time invariant system.



11. a) Derive the transfer function of armature controlled DC motor with essential block diagrams.

(OR)

- b) Determine the transfer function of the given system using block diagram reduction technique.

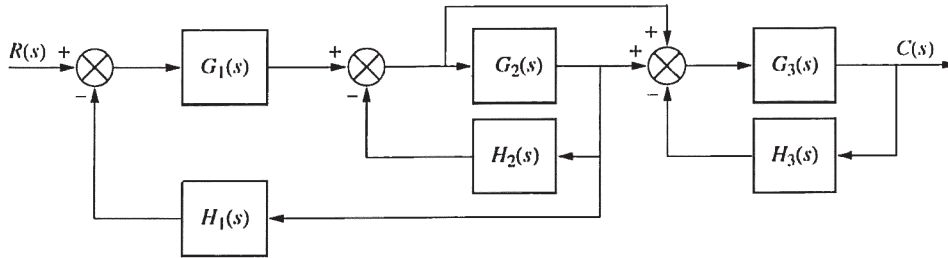

12. a) i) A closed loop control system is represented by the differential equation $\frac{d^2C}{dt^2} + 4 \frac{dc}{dt} = 16e$ where $e = r - c$ is the error signal. Determine the undamped natural frequency, damping ratio and percentage maximum overshoot for a unit step input. (8)

- ii) A unity feedback system is characterized by the open loop transfer function

$$G(s) = \frac{1}{s(0.5s + 1)(0.2s + 1)}$$

Determine the steady state errors for unit-step, unit-ramp and unit-acceleration input. (5)

(OR)

- b) Construct the root locus of the open loop transfer function

$$G(s)H(s) = \frac{K}{s(s + 2)(s^2 + 2s + 5)}$$

13. a) Sketch the Bode plot for the given transfer function. Determine Gain cross-over frequency phase cross-over frequency, gain margin and phase margin

$$G(s)H(s) = \frac{2000}{s(s + 2)(s + 100)}$$

(OR)

- b) Sketch the Polar plot for a unity feedback system with open loop transfer function $G(s) = \frac{1}{s(1 + s)^2}$. Also find the frequency at which $|G(j\omega) = 1|$ and the corresponding phase angle.



14. a) A unity feedback control system is characterized by the open loop transfer function $G(s) = \frac{K(s+13)}{s(s+3)(s+7)}$. Using Routh criterion, calculate the range of values of K for the system to be stable. Also determine the value of K the system become marginally stable and calculate the frequency of oscillation if any.

(OR)

- b) Draw the Nyquist plot and assess the stability of the closed loop system whose open loop transfer function is $G(s)H(s) = \frac{(s+4)}{(s+1)(s-1)}$.

15. a) i) Obtain the state model for the system described by the transfer function

$$T(s) = \frac{Y(s)}{U(s)} = \frac{1}{s^3 + 6s^2 + 10s + 5} \quad (8)$$

- ii) Obtain state transition matrix for the state model whose A matrix is given

by $A = \begin{pmatrix} 1 & 1 \\ 0 & 1 \end{pmatrix}$. (5)

(OR)

- b) Determine the state controllability and observability of the system

$$\dot{x}(t) = Ax(t) + Bu(t) \quad Y(t) = Cx(t) \quad A = \begin{bmatrix} -1 & 1 & 0 \\ 0 & -1 & 1 \\ 0 & 0 & -1 \end{bmatrix} \quad B = \begin{bmatrix} 0 \\ 1 \\ 1 \end{bmatrix} \quad C = [1 \quad 0 \quad 1]$$

PART – C

(1×15=15 Marks)

16. a) Compensate the system with the open loop transfer function $G_f(s) = \frac{K}{s(s+1)(s+5)}$ to meet the following specifications
- i) Damping ratio $\zeta = 0.3$
 - ii) Settling time $t_s = 12s$
- Velocity error constant $K_v \geq 8 \text{ s}^{-1}$.

(OR)

- b) An unity feedback servo mechanism whose $G(s) = \frac{K_v}{s(1+ST)}$ is designed to keep a radar antenna pointed at a flying aeroplane. If the aeroplane is flying with a velocity of 600 km/h, at a range of 2 km and the maximum tracking error is to within 0.1° , determine the required velocity error coefficient K_v .