

91854

-2-



PART – B

(5×13=65 Marks)

11. a) There are ten machines in the automatic lathe section of a certain machine shop. The setup time on an automatic lathe averages 5 hours. Average batch size for parts processed through the section is 100. Average operation time = 9.0 minutes. Under shop rules, an operator can be assigned to run one or two machines. Accordingly, there are five operators in the section for the ten lathes. In addition to the lathe operators, there are two setup workers who perform only machine setups. These setup workers are busy the full shift. The section runs one 8-hour shift per day, 5 days per week. Scrap losses are negligible and availability = 100%. The production control manager claims that the capacity of the section should be 2000 parts per week. However, the actual output averages only 1600 units per week. What is the problem and recommend a solution ?

(OR)

- b) Justify the seven forms of waste in manufacturing with examples.

12. a) Using the master schedule of Figure 1 and the product structures for P₁ and P₂ in figures 2 and 3. Determine the time-phased requirements for component C₆ and raw material M₆. The assembly lead time is 1 week for P₁, P₂, S₂ and S₃. For S₃ inventory on hand is 2 units and quantity on order is zero. For C₆, inventory on hand is 5 units and quantity on order is 10 for delivery in week 2 and for M₆, inventory on hand is 10 units and quantity on order is 50 for delivery in week 2.

Product Line Model	WEEK									
	1	2	3	4	5	6	7	8	9	10
Model P ₁								50		100
Model P ₂							70	80	25	

Figure : 1. Master Production Schedule

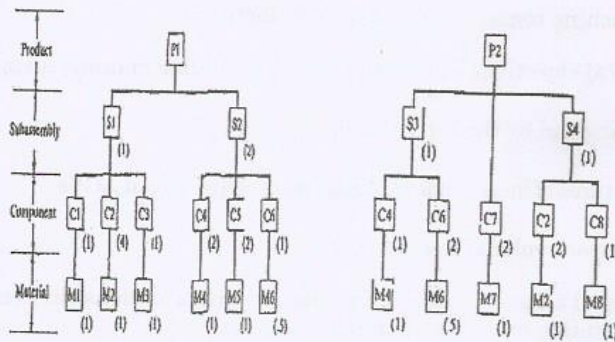


Figure : 2. Product Structure P1 Figure : 3. Product Structure P2

(OR)



- b) Discuss the following phases with respect to shop floor control.
- i) Order release. (5)
 - ii) Order Scheduling. (8)

13. a) The following Table 1 lists the weekly quantities and routings of ten parts that are being considered for cellular manufacturing in a machine shop. Parts are identified by letters and machines are identified numerically. For the data given, (a) develop the part-machine incidence matrix and (b) apply the rank order clustering technique to the part-machine incidence matrix to identify logical part families and machine groups. (3+10)

Table : 1

Part	Weekly Quantity	Machine Routing
A	50	3 → 2 → 7
B	20	6 → 1
C	75	6 → 5
D	10	6 → 5 → 1
E	12	3 → 2 → 7 → 4
F	60	5 → 1
G	5	3 → 2 → 4
H	100	3 → 2 → 4 → 7
I	40	2 → 4 → 7
J	15	5 → 6 → 1

(OR)

- b) Five machines used to produce a family of parts are to be arranged into a GT cell. The from-to data for the parts processed by the machines are shown in the table below. (a) Determine the most logical sequence of machines for this data (b) Construct the network diagram for the data, showing where and how many parts enter and exit the system. (c) Compute the percentages of in-sequence moves, bypassing moves and backtracking moves in the solution. (d) Develop a feasible layout plan for the cell. (4+3+3+3)

Table : 2

From	To				
	1	2	3	4	5
1	0	10	80	0	0
2	0	0	0	85	0
3	0	0	0	0	0
4	70	0	20	0	0
5	0	75	0	20	0

91854

-4-



14. a) Write an engineering brief on the following :
- i) Dedicated FMS and Random order FMS. (7)
 - ii) FMS Operational issues. (6)
- (OR)
- b) In context of the AGVs describe the following :
- i) Self guided vehicle. (7)
 - ii) Traffic control. (6)

15. a) Discuss the Common Robot Configurations in detail with the configuration diagram.

(OR)

- b) Discuss the robot control systems in detail with the neat sketches.

PART – C

(1×15=15 Marks)

16. a) Analyze the design features of the components part concept and the production steps required to design those features.

(OR)

- b) Analyze the use of Flexible machining system for the mechanical processes with a case study.